



Graver Technologies

Filtration | Separation | Purification

Stratum™ A Series Melt Blown Filter Cartridges

Absolute Rated Melt Blown Filters

Stratum A Series melt blown depth filters deliver 99.9% efficiency at the stated micron for the most demanding applications. By utilizing ultra fine fibers and controlled thermal bonding, the Stratum A series retains captured contaminant even at higher differential pressures.

Stratum Series Features - Benefits

- Absolute retention ratings from 0.5 to 70 microns
- Multi-zone melt blown depth filter with a graded pore structure for maximum dirt holding capacity
- Thermally bonded fibers for high void volume and long on-stream life
- Lot traceable filters come with certificate of conformance.
- 100% polypropylene – FDA listed materials of construction
- All components meet USP Class VI criteria and are safe for use in pharmaceutical applications
- Molded center core for higher temperature and pressure capability
- Free of surfactants, binders and adhesives
- Certified to NSF/ANSI 61 as drinking water system components*

Filter Specifications

Media:	Polypropylene
End caps/center core:	Polypropylene
Gaskets/O-rings:	Silicone, EPDM, Buna N, Santoprene, Viton and Teflon encapsulated Viton (o-rings only)
Micron ratings:	0.5, 1, 3, 5, 10, 20, 30, 50, 70

Dimensions

Nominal lengths:	4, 5, 9.75, 10, 19.5, 20, 29.25, 30, 39, 40 inches (10.2, 12.7, 24.8, 25.4, 49.5, 50.8, 74.3, 76.2, 99.1, 101.6 cm)
Outside diameter:	2.5 in (6.35 cm)
Inside diameter:	1 in (2.54 cm)

Operating Conditions

Maximum differential pressure:	150 psid @ 68°F (10.3 bar @ 20°C) 90 psid @ 150°F (6.2 bar @ 66°C) 35 psid @ 176°F (2.4 bar @ 80°C)
Recommended changeout differential pressure:	35psid (2.4 bar)
Steam Sterilization:	Stratum single open end style filters may be autoclaved under no end load conditions for 30 minutes at 121°C. Filters should be cooled to normal operating temperatures prior to use.



Applications

- Chemicals
- Paint/Ink
- Water
- Plating
- Pharmaceuticals
- Food and beverages
- Microelectronics
- Cosmetics



Certified to NSF/ANSI 61

Filter Removal Efficiency


Micron Rating	99.9% Beta 1000	99% Beta 100	90% Beta 10
0.5 micron	0.6	0.5	0.4
1 micron	1.0	.8	.5
3 micron	3	2.3	1.4
5 micron	5	4.0	2.7
10 micron	10	7	4
20 micron	20	15	12
30 micron	30	20	14
50 micron	50	34	25
70 micron	70	50	39

*NSF61 applies to NN, P6 and PX styles only

Stratum A Series Nomenclature Information

STA	0.5	-30	N	N
Product Series	Retention Rating (microns)	Length (inches)	End Configuration	Gasket or O-Ring
STA - Stratum A Series	0.5	4	P Double Open End (hard endcaps)	S Silicone
	1	5	P2 226/Flat Single Open End	B Buna-N
	3	9.75	P3 222/Flat Single Open End	E EPDM
	5	10	P6 Self-Seal Spring on One End	V Viton
	10	19.5	P7 226/Fin Single Open End	T Teflon encap. Viton (O-Rings only)
	20	20	P8 222/Fin Single Open End	N None
	30	29.25	PX Extended Core	
	50	30	N None (Cut Ends)	
	70	39	DBG Direct Bond Santoprene Gaskets	
			40	AM Single Open End, Internal O-Ring

Example: STA 0.5-30NN = Stratum A filter, 0.5 micron, 30 inches, cut ends, No gasket or o-ring

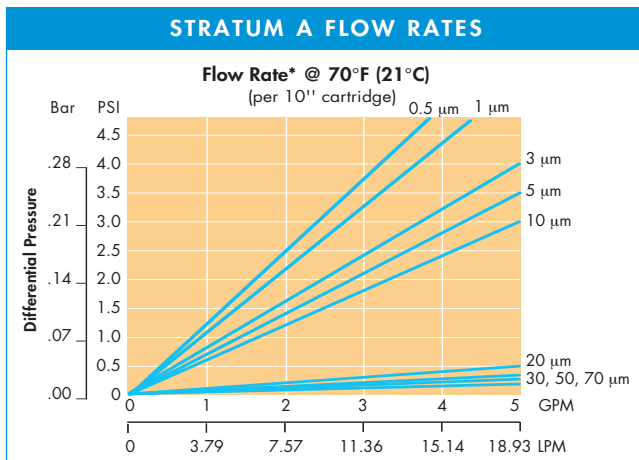

Note: For chemical compatibility, flow rates, and temperature requirements please consult the factory or your local Graver distributor.

For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-800-510-0932**

E-mail us at info@gravertech.com

Graver Technologies Europe (UK): **+44-1424-777791**

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. STRATUM is a trademark of Graver Technologies, LLC.

DISTRIBUTED BY:



Pureworld Solutions Inc.

Vancouver Office:
4916 River Reach,
Delta, BC, V4K 4A4

T: 604-878-8092
info@pureworld.ca
www.pureworld.ca



Graver Technologies

200 Lake Drive
Glasgow,
DE 19702 U.S.A.

302-731-1700
800-249-1990
Fax: 302-369-0938

e-mail: info@gravertech.com
web site: www.gravertech.com

