



Graver Technologies

Filtration | Separation | Purification

WaterTEC™ Filter Series

Absolute Rated Polyethersulfone Membrane Filter Cartridges

The WaterTEC filter series is constructed of absolute rated, hydrophilic, asymmetric polyethersulfone membrane and polypropylene components. The filter is designed for overall filtration economy and provides excellent flow rates and throughputs.

Filter Features–Benefits

- Low pressure drop reduces energy costs
- High dirt holding capacity minimizes change-outs and down time
- All thermal bonded construction with no adhesives
- Available in all common configurations to allow use of existing filter housings
- Cost effective absolute filtration
- All materials are FDA listed for food and beverage contact (U.S. CFR, Title 21)
- Meets USP, Class VI for plastics

Filter Specifications

Media:	Asymmetric polyethersulfone
Inner core, end caps, cage:	Polypropylene
Support layers:	Spunbonded Polypropylene
Gaskets/O-Rings:	Buna-N, EPDM, Silicone, Viton, Teflon Encapsulated Viton (O-Rings only)
Micron ratings:	0.05, 0.1, 0.2, 0.45, 0.65 μm
Compatibility:	Compatible with most common chemical cleaning, sanitizing and sterilizing agents and with pH range from 1–14. Consult factory for specific compatibility information
Cleanliness:	Non-fiber releasing, no wetting agents


Dimensions and Operating Parameters

Typical nominal lengths:	9.75", 10", 20", 30", 40" (24.7, 25.4, 50.8, 76.2, 101.6cm)
Outside diameter:	2.7" (6.86 cm)
Inside diameter:	1.1" (2.79 cm)
Surface area:	6 ft ² . (0.56m ²) per 10 inch element
Maximum sustained operating temperature:	180°F (82°C) at 20 psid (1.38 bar)
Maximum differential pressure:	60 psid @ 80°F (4.14bar @ 27°C) 30 psid @ 160°F (2.07 bar @ 71°C) 15 psid @ 200°F (1.03 bar @ 93.3°C)
Recommended change-out pressure:	35 psid (2.4 bar)



Typical Applications

- General water filtration
- DI water prefilter
- DI water post filter
- Aqueous based chemical processing

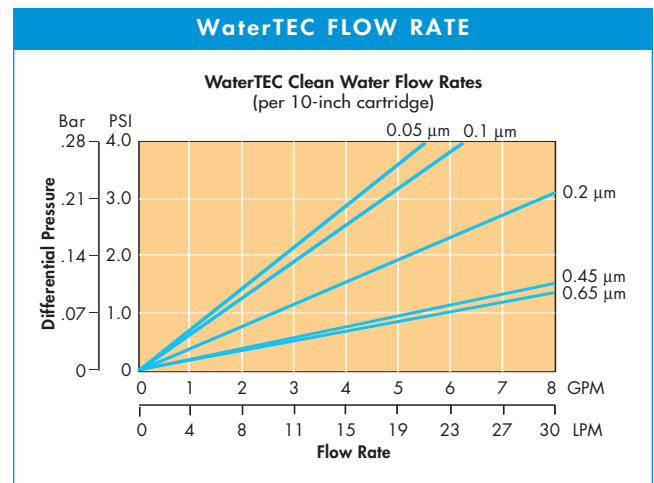

WaterTEC Nomenclature Information

WaterTEC	0.2	-10	P2	E	- R
Filter Type WaterTEC Series Filters		Nominal Length (inches) -9.75 -10 -20 -30 -40			Pre-Rinse Option -R Factory Pre-Rinse
	Retention Rating (microns) 0.05 0.1 0.2 0.45 0.65			Gasket or O-Ring S Silicone B Buna-N E EPDM V Viton T Teflon encap. Teflon (O-Rings only) T Teflon gasket	
			End Configuration P Double Open End P2 226/Flat Single Open End P3 222/Flat Single Open End P7 226/Fin Single Open End P8 222/Fin Single Open End AM Single open end, internal O-Ring		

Example: WaterTEC 0.2-10 P2E

For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-800-510-0932**

E-mail us at info@gravertech.com

Graver Technologies Europe (UK): **+44-1424-777791**

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

WaterTEC is a trademark of Graver Technologies, LLC.

DISTRIBUTED BY:



Pureworld Solutions Inc.

Vancouver Office:
4916 River Reach,
Delta, BC, V4K 4A4

T: 604-878-8092
info@pureworld.ca
www.pureworld.ca



Graver Technologies

200 Lake Drive
Glasgow,
DE 19702 U.S.A.

302-731-1700
800-249-1990
Fax: 302-369-0938

e-mail: info@gravertech.com
web site: www.gravertech.com

