



Filtration | Separation | Purification

ZTEC™-E Polyethersulfone Membrane Cartridge Filters

Pleated Polyethersulfone (PES) Membrane for Final Filtration of Ultrapure Water

ZTEC-E microelectronics grade cartridges represent Graver’s latest development in ultrapure water filtration technology. The filters are inherently hydrophilic and contain no added surfactants or wetting agents that could contaminate pure and ultrapure water streams. The PES membrane offers superior flow characteristics, high contaminant capacity and consistent removal of sub-micron particles. The cartridges exhibit rapid rinse-up to 18 MΩ-cm resistivity and single digit ppb levels of TOC.

Filter Features–Benefits

- Manufactured, flushed, tested and packaged, in an ISO Class 7 Cleanroom Environment.
- Filters are 100% flushed with 18 MΩ-cm DI water and integrity tested.
- Resistivity rinse-up to 18 MΩ-cm and single digit ppb TOC levels with minimal throughput.
- Available in a variety of end cap/adaptor configurations to fit all industry-standard housings.
- Pore size, lot and serial number are stamped on each filter element for identification and traceability.

Filter Specifications

Media:	Asymmetric Polyethersulfone membrane
Inner core, end caps, cage:	Polypropylene
Support layers:	Spunbonded Polypropylene
Gaskets/O-Rings:	Buna-N, EPDM, Silicone, Viton, Teflon Encapsulated Viton O-Rings
Micron ratings:	0.03 μm, 0.1 μm, 0.2 μm, 0.45 μm

Dimensions and Operating Parameters

Nominal lengths:	9.75", 10", 20", 30", 40" (24.7, 25.4, 50.8, 76.2, 101.6 cm)
Outside diameter:	2.7" (6.9 cm)
Inside diameter:	1.0" (2.54 cm)
Surface area:	7.6 ft ² (0.7 m ²) per 10-inch element
Maximum differential pressure:	60 psid @ 80°F (4.14 bar @ 27°C) 30 psid @ 160°F (2.07 bar @ 71°C) 15 psid @ 203°F (1.03 bar @ 95°C)
Maximum reverse differential pressure:	40 psid @ 70°F (2.8 bar @ 21°C)
Recommended change-out pressure:	35 psid (2.4 bar)



Performance Specifications

Hot DI Water

Filter cartridge will withstand temperatures of 185°F (85°C) for up to 30 consecutive minutes.

Cleaning/Sanitization

Compatible with most common chemical cleaning, sanitizing and sterilizing agents and with pH range from 1-14. Consult factory for specific compatibility information.

Rinse-Up Volumes

- Resistivity rinse-up to 18 MΩ-cm: <30 minutes at a flow of 3 gpm per 10-inch element.
- Rinse-up to single digit ppb TOC in <120 minutes at a flow of 3 gpm per 10-inch element.

Integrity Test Specifications


Maximum Diffusive Air Flow (per 10-inch cartridge) values for ZTEC-E filters wet with water:

0.03 μm:	≤ 50 cc/min @ 45 psig (3.1 bar)
0.1 μm:	≤ 50 cc/min @ 40 psig (2.8 bar)
0.2 μm:	≤ 35 cc/min @ 30 psig (2.1 bar)
0.45 μm:	≤ 35 cc/min @ 20 psig (1.4 bar)

ZTEC-E Nomenclature Information

<p style="text-align: center;">ZTEC-E</p> <p>Filter Type ZTEC-E Series Filters</p>	<p>0.45</p>	<p>-30</p> <p>Nominal Length (inches)</p> <p>-9.75 -10 -20 -30 -40</p>	<p>P8</p>	<p>T</p> <p>Gasket or O-Ring</p> <p>S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only)</p>
<p>Retention Rating (microns)</p> <p>0.03 0.1 0.2 0.45</p>			<p>End Configuration</p> <p>P Double Open End P2 226/Flat Single Open End P3 222/Flat Single Open End P7 226/Fin Single Open End P8 222/Fin Single Open End AM Single open end, internal O-Ring</p>	

Example: ZTEC-E 0.45-30 P8T

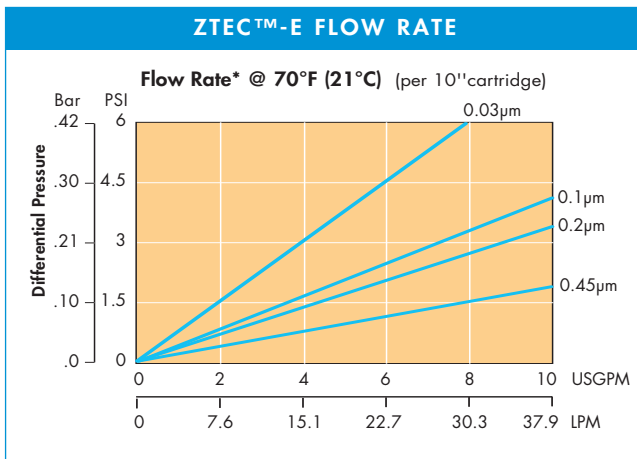

For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-800-510-0932**

E-mail us at info@gravertech.com

Graver Technologies Europe (UK): **+44-1424-777791**

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

ZTEC-E is a trademark of Graver Technologies, LLC.

DISTRIBUTED BY:



Pureworld Solutions Inc.

Vancouver Office:
4916 River Reach,
Delta, BC, V4K 4A4

T: 604-878-8092
info@pureworld.ca
www.pureworld.ca



Graver Technologies

200 Lake Drive
Glasgow,
DE 19702 U.S.A.

302-731-1700
800-249-1990
Fax: 302-369-0938

e-mail: info@gravertech.com
web site: www.gravertech.com

