



Graver Technologies

FILTRATION | SEPARATION | PURIFICATION



Citadel® Series Filter Cartridges

*100% integrity tested to ensure
performance standards*

Product Specifications

Media: PTFE Membrane

Inner core, end caps, cage: PFA

Support layers:

FEP, Expanded PTFE

Gaskets/O-Rings:

Chemraz®, Kalrez®,

Teflon Encapsulated Viton

Micron ratings:

0.05, 0.1, 0.2, 0.45, 1, 10 µm

Dimensions

Nominal lengths:

10" 20" 30" 40"

25.4 50.8 76.2 101.6 cm

Outside diameter: 2.7" (6.9 cm)

Inside diameter: 1.0" (2.54 cm)

Surface area: 7.9 ft² (0.71 m²)
per 10-inch

Operating Parameters

Maximum differential pressure:

80 psid (5.5 bar) @ 24°C (75°F)

55 psid (3.8 bar) @ 75°C (167°F)

30 psid (2.0 bar) @ 125°C (257°F)

15 psid (1.0 bar) @ 150°C (300°F)

Maximum reverse pressure:

50 psid (3.4 bar) @ 24°C (75°F)

15 psid (1.0 bar) @ 121°C (250°F)

ALL-FLUOROPOLYMER CARTRIDGE FILTERS FOR AGGRESSIVE APPLICATIONS

Citadel pleated membrane cartridges feature a PTFE membrane and PFA structural components to provide excellent chemical and temperature resistance for aggressive chemical applications such as etchers, strippers, cleaners and bulk chemicals. The all- fluoropolymer construction provides for the highest level of fluid purity and will exhibit rapid rinse-up to 18 MΩ-cm resistivity and single digit ppb levels of TOC. Citadel filter cartridges are produced and manufactured in an ISO cleanroom and are 100% integrity tested to ensure performance standards.

FEATURES & BENEFITS


- Manufactured, flushed, tested and packaged in an ISO Class 7 Cleanroom Environment
- Filters are flushed with 18 MΩ-cm DI water to ensure low extractables and low particle shedding
- 100% integrity tested to provide reliable performance
- Resistivity rinse-up to 18 MΩ-cm and single digit ppb TOC levels with minimal throughput
- Pore size ratings from 0.05 to 10 micron to meet a broad range of applications
- Wet-Pack option available to eliminate the requirement for solvent pre-wetting in aqueous applications

CITADEL NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)		Nominal Length (inches)	End Configuration	Gasket or O-Ring	Option
Citadel Series Filters	0.05	0.45	-10	P3 222/Flat Single Open End	C Chemraz	-W Pre-Wet
	0.1	1	-20		K Kalrez	
	0.2	10	-30 -40		T Teflon encap. Viton (Standard)	
Example: CTL 0.05-20P3T-W						
CTL	0.05		-20	P3	T	-W

CITADEL FLOW RATE

**Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)**

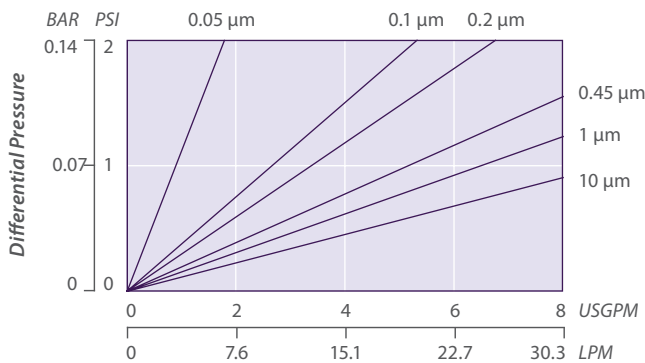

RINSE-UP VOLUMES

Resistivity rinse-up to 18 MΩ-cm	< 5 liters
Particle cleanliness	< 10 particles/mL > 0.1 μm
Extractable levels	< 25 ppb total in 5% HCl

INTEGRITY TEST SPECIFICATIONS

Maximum Diffusive Air Flow (per 10-inch cartridge) values for Citadel filters wet with 60/40 IPA/water:

Pore Size	Specification
0.05 μm	≤ 90 cc/min @ 22 psig (1.5 bar)
0.1 μm	≤ 50 cc/min @ 18 psig (1.2 bar)
0.2 μm	≤ 50 cc/min @ 12 psig (0.8 bar)
0.45 μm	≤ 50 cc/min @ 5 psig (0.34 bar)
1 μm	≤ 50 cc/min @ 3 psig (0.2 bar)
10 μm	N/A

FOR MORE INFORMATION

GTX-345 4-21

Customer Service/Technical Support: 1-888-353-0303
 Europe (UK): +44-1424-777791 | China: +86-21-5238-6576
 Asia: +65 9671 9966

DISTRIBUTED BY

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. Citadel is a trademark of Graver Technologies, LLC.



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702 | 302-731-1700 | 800-249-1990
 Fax: 1-302-369-0938 | info@gravertech.com | www.gravertech.com

A member of The Marmon Group—A Berkshire Hathaway Company